



CHARACTERISTICS

- 3 speed evaporator power switch 16A@12V and 10A@24V
- Proportional hot water valve control
- Return temperature sensor
- Duct temperature sensor
- Fahrenheit scale
- Fresh air output
- 5A positive clutch output
- A/C button
- Fresh air button
- Diagnostic LED

Innovative design

TEMPERATURE CONTROL PANEL

DOUBLE PID 3 SPEED VENTILATION AND


GL-P8HGL213

• Designed for heavy-duty applications

OEM

HVAC

- Analog commands
- Backlit buttons and symbols
- Customer logo on the panel (optional)
- Screwless installation
- Automotive connector
- High frontal protection grade- IP 54

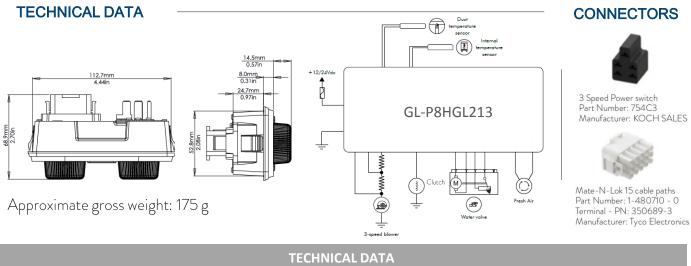

TECHNICAL DATA	
OPERATING VOLTAGE	12 Vdc to 24 Vdc
VOLTAGE RANGE	9 Vdc to 30 Vdc
MAXIMUM VOLTAGE	32 Vdc during 5min
MAXIMUM OUTPUT CURRENT	See description above
OUTPUT SHORT CIRCUIT	Protected ***
REVERSE POLARITY	Protected *
OPERATING TEMPERATURE	-40°C to +85°C /-40°F to +185°F
STORAGE TEMPERATURE	-40°C to +125°C /-40°F to +257°F
TEMPERATURE SENSOR	NTC 10K
FRONTAL PROTECTION DEGREE	IP 54
COMMUNICATION	N/A
MAXIMUM CURRENT CONSUMPTION	40mA @ 12Vdc, 20mA @ 24Vdc **

* According to product specifications.

** Consumption , may vary according to customer specifications. *** Except on power switch.

We keep the right to update or change information regarding products without prior notice.

ED0036 EQLDER NEO P8HGL213_ING REV 1